FO.Mixer

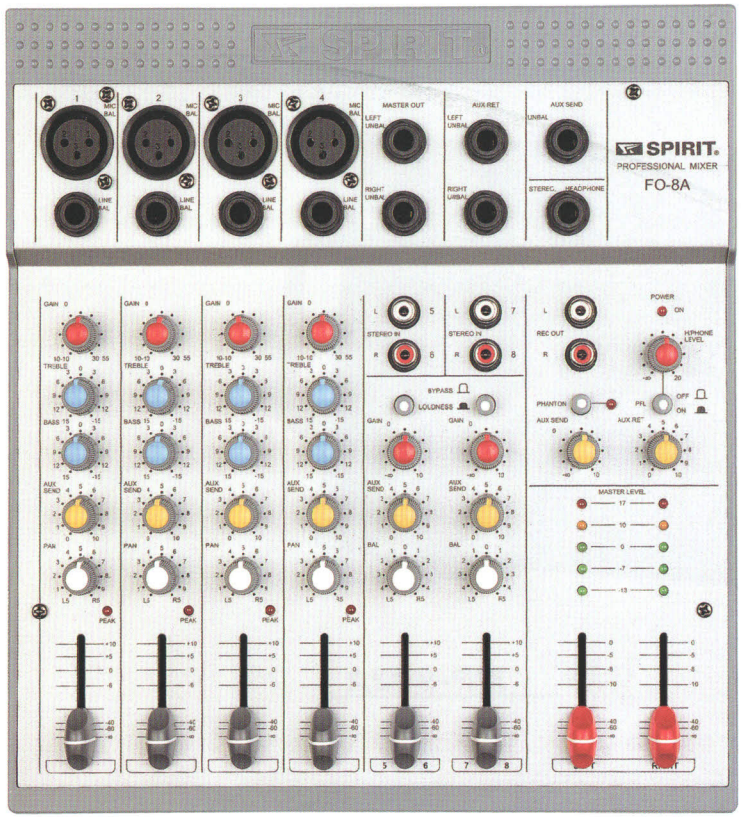

CHARACTERISTIC

- 8 channel ,2 sereo,one AUX output 2 Aux return.
- Build in 48V phantom power.
- 2 band EQ input.
- 2 buses and/recording output.
- Outside power supply.

TECHNIQUE INDEX

Product model	FO–8A
Input	4 Mic+2group stereo
AUX intput/output	2/1
EQ	2 band
Frequency response	20Hz–20KHz
SNR	>90dB
Total Harmonic Distortion	<0.03%
Input impedance	Line 10KΩ/Mic 1.5KΩ
Output impedance	100Ω
Input port	XLR/TRS
Output port	XLR/TRS
Heard phone impedance	30Ω ~ 600Ω
Power supply	110V/220V AC50~60Hz
Size L x W x H(mm)	245*260*55/35
Net weight	0.9KG